



BELT SANDING AGGREGATE


Efficient sanding of convex and flat edges



Fully automated grinding of edges on CNC machines

Technical Specifications

Max. input speed:	7,560 rpm
Max. output speed:	1,890 rpm
Gear ratio:	4 : 1
Max torque:	1 Nm
Permissible operating temperature:	max. 85°C
Positioning of torque arm with respect to tool:	4 x 90°
Machining angle:	vertical
Number of tool outputs:	1 / fixed
Lubrication:	Grease / Lifetime lubrication

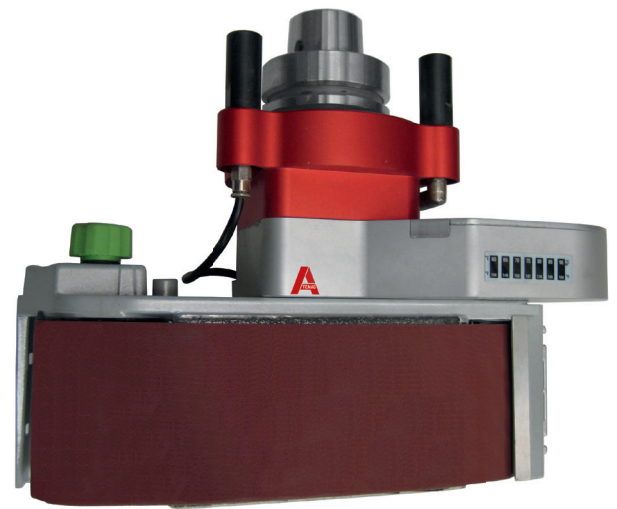

Tool connection:

- Grinding belt 533x75 mm
- Other connections on request



Machine connection:

ATEMAG aggregates are used on all CNC machines and robot systems. The machine connection is precisely matched to the technical requirements of the CNC machine or robot.

